

TECHNICAL DATA SHEET

Spike plate P33/40 N and P33/50 N STAINLESS
for high-tensile steel wire mesh TECCO® STAINLESS




Spike plate P33

Length:	330 mm
Width:	205 mm
Thickness:	7 mm
Hole diameter:	40 mm / 50 mm
Length of the spikes:	min. 20 mm
Weight:	2.2 kg
Geometry:	diamond
Longitudinal bending resistance:	≥ 2.5 kNm


Spike plate P33 corrosion protection

Stainless steel (INOX):	1.4404 (AISI 316L)
-------------------------	--------------------


Spike plate P33/40N, P33/50N
STAINLESS

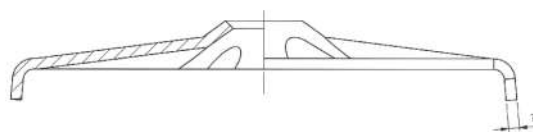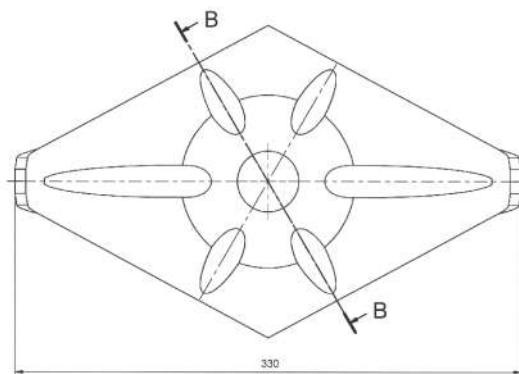

Section B-B

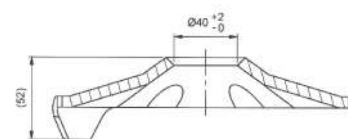

Section B-B

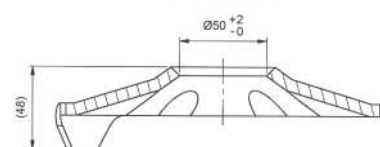

Rockfall, slides, mudflows and avalanches are natural events and therefore cannot be calculated. This is why it is impossible to determine or guarantee absolute safety for persons and property with scientific methods. This means that to provide the protection we strive for, it is imperative to maintain and service protective systems regularly and appropriately. Moreover, the degree of protection can be diminished by events that exceed the absorption capacity of the system as calculated to good engineering practice, failure to use original parts or corrosion (i.e., from environmental pollution or other outside influences).