

DATOS TÉCNICOS



Clips de unión T3 de acero de alta resistencia para alambre de malla TECCO®

Clip de unión T3	
Dimensiones:	21 · 60 mm
Nº de clips por apertura del rombo:	1 pcs/apert. G65/2+G65/3 2 pcs/apert. G65/4
Nº de clips por m' para la conexión del lateral del rollo:	7 pcs/m G65/2+G65/3 14.4 pcs/m G65/4
Peso:	15.7 g por clip

Alambre de acero clip de unión T3	
Diámetro del alambre:	d = 4.0 mm
Límite elástico:	$f_t \geq 1'770 \text{ N/mm}^2$
Material:	Alambre de acero de alta resistencia
Resistencia a tracción:	$Z_w \geq 22 \text{ kN}$

Clip de unión T3 Protección contra la corrosión	
Protección contra la corrosión:	GEOBRUGG ULTRACOATING®
Composición:	94.5% Zn / 5% Al + 0.5% aditivo especial
Cobertura:	min. 150 g/m ²

Clips de unión T3

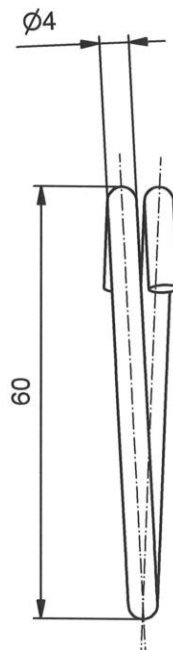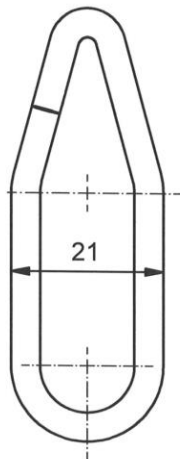

Rockfall, slides, mudflows and avalanches are natural events and therefore cannot be calculated. This is why it is impossible to determine or guarantee absolute safety for persons and property with scientific methods. This means that to provide the protection we strive for, it is imperative to maintain and service protective systems regularly and appropriately. Moreover, the degree of protection can be diminished by events that exceed the absorption capacity of the system as calculated to good engineering practice, failure to use original parts or corrosion (i.e., from environmental pollution or other outside influences).