


TECHNICAL DATA SHEET

Rockfall protection barrier GBE-100A-R V2

Certification details

System drawing no. / Rope assembly no.	D146685	Residual height (category)	Cat. A (> 50%)
Total absorbed energy until total stopping of the block	115 kJ	Residual height MEL / in % of tested height	1.54 m / 78%
Kinetic energy of the block	106 kJ	Residual height SEL / in % of tested height	-
Energy class acc. EAD-340059-00-0106	0	Elongation MEL (acc. to EAD 340059-00-0106)	2.45 m
Energy class acc. FOEN	1	Elongation SEL (acc. to EAD 340059-00-0106)	-
Swiss Guideline Certificate (FOEN)	FOEN 14-6		
European Technical Assessment (ETA)	ETA 15/0304		
Certificate of constancy of performance	1301 - CPR - 1117		
		System Specification	
Certification test layout	vertical drop	Post spacing (min. / max.)	6 - 12 m
Tested heights	2.0 m	Standard heights	2.0 / 2.5 / 3.0 m
Certified heights acc. ETA	2.0 - 2.5 m	UPSLOPE ANCHOR ROPES Characteristic anchor force	-
Certified heights acc. FOEN	2.0 - 3.0 m	LATERAL Characteristic anchor force	205 kN

GBE-100A-R V2

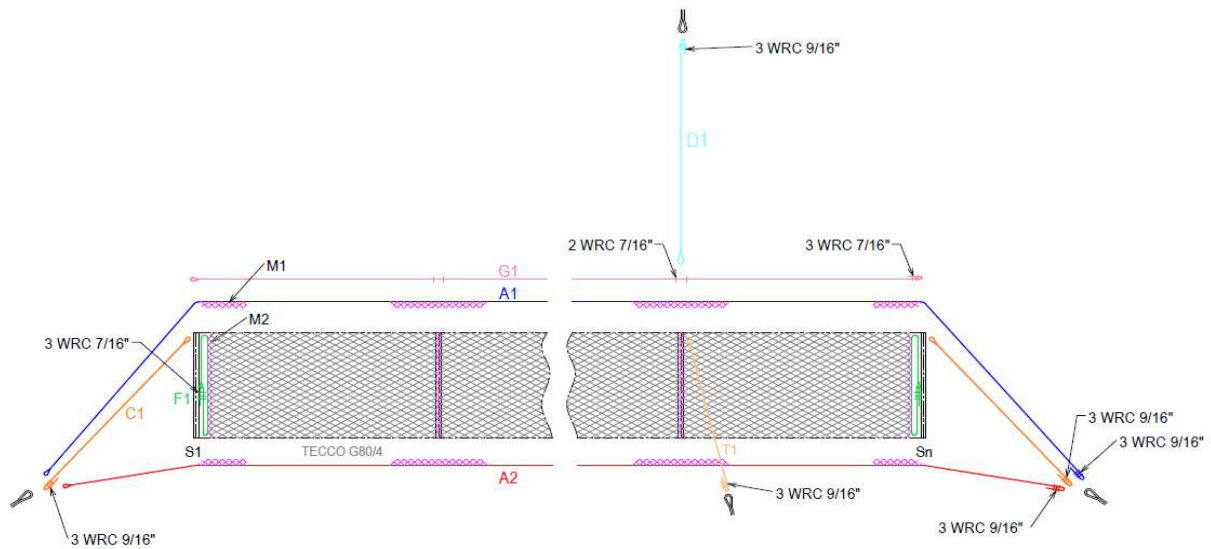

Details see installation manual

Rockfall, slides, mudflows and avalanches are natural events and therefore cannot be calculated. This is why it is impossible to determine or guarantee absolute safety for persons and property with scientific methods. This means that to provide the protection we strive for, it is imperative to maintain and service protective systems regularly and appropriately. Moreover, the degree of protection can be diminished by events that exceed the absorption capacity of the system as calculated to good engineering practice, failure to use original parts or corrosion (i.e., from environmental pollution or other outside influences).

Subject to change without notice