CE European Technical Approval ETA-17/0116

GEOBRUGG BRUGG Safety is our nature

TECHNICAL DATA SHEET

High-tensile Rockfall Protection Netting DELTAX® G80/2

DELTAX® high-tensile rockfall protection netting	
Mesh shape:	rhomboid
Diagonal:	x · y = 3.98 · 6.89 in (+/-5%)
Mesh width:	D_i = 3.15 in (+/-5%)
Angle of mesh:	ε ca. 53 degrees
Total height of mesh:	h_{tot} = 0.31 in (+/- 0.04 in)
Clearance of mesh:	h_i = 0.16 in (+/- 0.04 in)
No. of meshes longitudinal:	n_l = 1.74 pcs/ft
No. of meshes transversal:	n_q = 3.02 pcs/ft

Load capacity	
Tensile strength of mesh longitudinal:	z_l ≥ 3.64 kips/ft [1)]

[1)] referring to LGA test report 12/2009

DELTAX® steel wire	
Wire diameter:	d = 0.079 in
Tensile strength:	f_t ≥ 256 ksi
Material:	high-tensile steel wire
Tensile resistance of a wire:	Z_w = 1.2 kips

DELTAX® corrosion protection	
Corrosion protection:	GEOBRUGG SUPERCOATING®
Compound:	95% Zn / 5% Al
Coating:	min. 0.3 oz/ft²

DELTAX® mesh standard roll	
Roll width:	b_{Roll} = 12.8 ft
Roll length:	l_{Roll} = 98.4 ft (on request until 328 ft)
Total surface per roll:	A_{Roll} = 1260 ft²
Weight per ft²:	g = 0.13 lbs/ft²
Weight per mesh roll:	G_{Roll} = 164 lbs
Mesh edges:	mesh ends knotted

DELTAX® G80/2

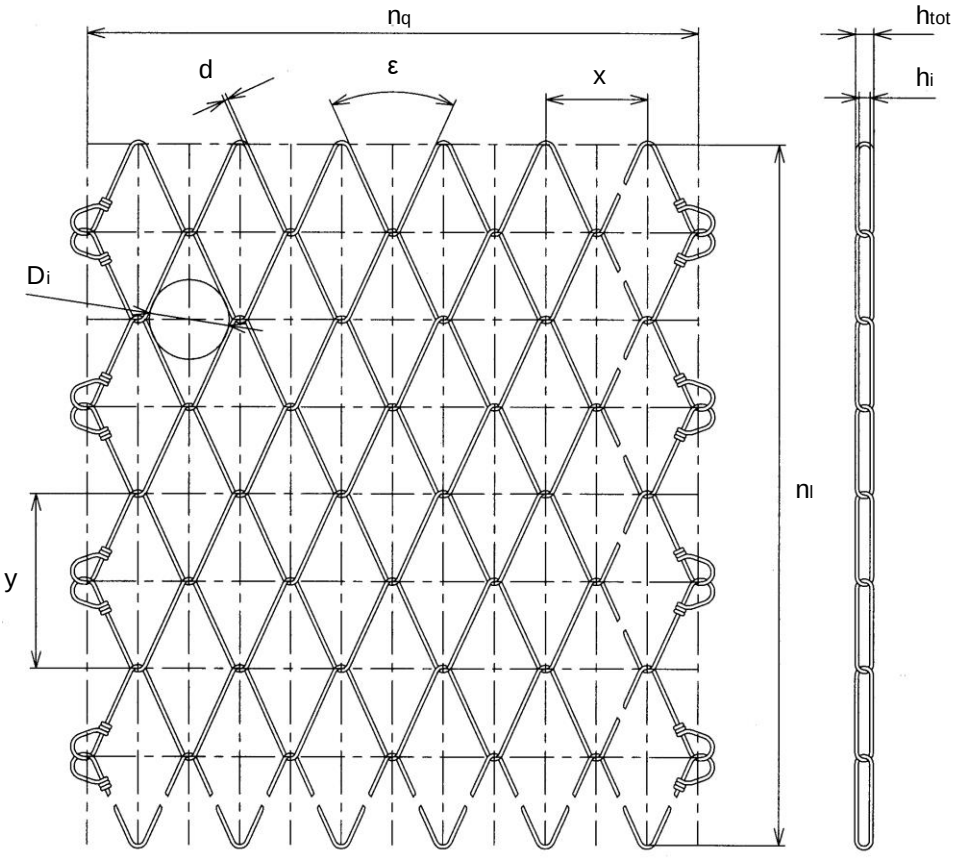

Rockfall, slides, mudflows and avalanches are natural events and therefore cannot be calculated. This is why it is impossible to determine or guarantee absolute safety for persons and property with scientific methods. This means that to provide the protection we strive for, it is imperative to maintain and service protective systems regularly and appropriately. Moreover, the degree of protection can be diminished by events that exceed the absorption capacity of the system as calculated to good engineering practice, failure to use original parts or corrosion (i.e., from environmental pollution or other outside influences).

Small deviations from the mesh geometry as well as shape and other modifications are subject to change without notice.